


Technical data sheet

Series terminals 25 mm², polypropylene

Item number: 2056730

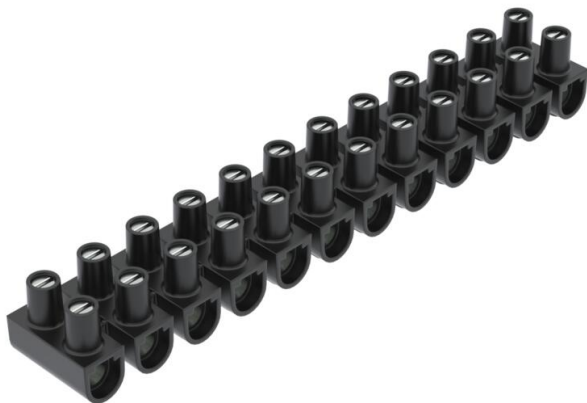

Tested according to EN 60998. Brass terminals, steel screws, electrogalvanised and transparently passivated, 12-pole, individual terminals detachable from strips. Captive upwards screw. Max. approved ambient temperature to EN 60998: -5 to +80 °C. Nominal cross-section 25 ± mm² Nominal voltage 750 V Nominal current 101 A Max. connections per side: 25 mm² flexible or 6 mm² rigid.



PP Polypropylene

Master data

Item number	2056730
Type	79 CE SW/ORLK 25
Description 1	Terminal strip
Available from	01.12.2025
Manufacturer	OBO
Dimension	25mm ²
Colour	Black
Material	Polypropylene
Smallest sales unit	200
Unit of quantity	Piece
Weight	13.2 kg
Weight unit	kg/100 pc.

Technical data sheet

Series terminals 25 mm², polypropylene

Item number: 2056730



Dimensions



Length	187 mm
Width	30 mm
Height	28 mm

Technical data

Closing plate required	no
Connectable conductor cross-section, fine-wire without wire-end ferrule, max.	16 mm ²
Connectable conductor cross-section, fine-wire without wire-end ferrule, min.	16 mm ²
Connectable conductor cross-section, multi-wire, max.	25 mm ²
Connectable conductor cross-section, multi-wire, min.	25 mm ²
Connection position	Side
No. of terminals	12
Number of screwless terminals per pole	2
Version of electrical connection 1	Screw connection
Version of electrical connection 2	Screw connection
Drill hole spacing, centre	16 mm
Explosion-tested version	no
Suitable for flexible conductors	yes
Suitable for solid conductors	yes
Suitable for multi-wire conductors	yes
Mounting type	Direct mounting
Nominal cross-section, min.	25 mm ²
Nominal voltage	750 V
Nominal current	101 A
Pole number	12
Cross-section	Max. connections per side: 25 mm ² flexible or 16 mm ² rigid mm ²
Screw tightening torque	2 kN/m
Permitted temperature range, max.	80 °C
Permitted temperature range, min.	-5 °C
Transparent	no
Ambient temperature	80 °C