Technical data sheet

Service pole, type ISSHS140250

Item number: 6290020



ISS aluminium service pole, 2-compartment, with a 76.5 mm system opening.

Empty, equippable with standard devices (socket, telephone, etc.), max. 4 devices

Fixing possible directly on floor. Accessory mounting boxes to be ordered separately.

The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD.... The installation of a partition of type GA-TW (6279711) and the installation of the cover clip, type KL80A, are possible as an option.







Aluminium

| R/I | aste | | 1040 |
|-----|------|---|------|
| IVI | aste | u | ala |


| 6290020 |
|----------------------|
| ISSHS140250RW |
| Service pole |
| floor |
| OBO |
| 250x130x140 |
| Pure white; RAL 9010 |
| Aluminium |
| 1 |
| Piece |
| 175 kg |
| kg/100 pc. |
| |


Technical data sheet

Service pole, type ISSHS140250





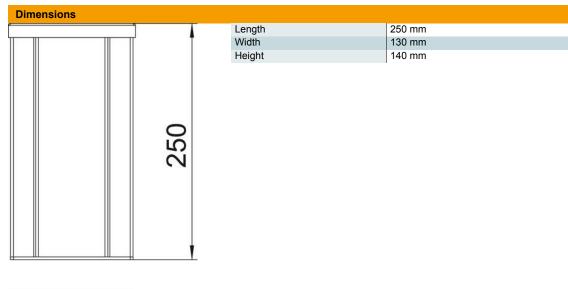



| _ | | | _ | |
|-----|------|-----|----|-----|
| T ~ | chni | | 40 | +- |
| 16 | | Cai | ua | ıια |
| | | | | |

| Number of usable covers | 2 |
|-------------------------------|--------------|
| Number of compartments | 2 St. |
| Version for | Double-sided |
| Fastening type | Bolts |
| Floor mounting | yes |
| Ceiling mounting | no |
| Continuous profile | yes |
| Halogen-free | yes |
| Cable entry | Bottom |
| Cover width | 76.5 mm |
| Changes according to location | no |
| Pole shape | Rectangular |
| Pole height, min. | 250 mm |
| Adjustable | no |
| Pre-wired | no |