

# Technical data sheet

## Cover, cross-over FS

Item number: 7027810



Cover for cross-over fitting for lockable and screw-on cable trays in indoor areas, to protect cables against damage and soiling. Fastening through attachment of the section cover. Suitable for all side heights.  
The cover can be used with fittings of all side heights.



St

Steel

FS

Strip galvanized

### Master data

|                                    |                           |
|------------------------------------|---------------------------|
| Item number                        | 7027810                   |
| Type                               | RKD 600 FS                |
| Description 1                      | Cover                     |
| Description 2                      | for cross-over            |
| Manufacturer                       | OBO                       |
| Dimension                          | B600mm                    |
| Colour                             | zinc                      |
| Material                           | Steel                     |
| Surface                            | Strip galvanized          |
| Surface standard                   | DIN EN 10346              |
| Smallest sales unit                | 1                         |
| Unit of quantity                   | Piece                     |
| Weight                             | 400 kg                    |
| Weight unit                        | kg/100 pc.                |
| CO2 Footprint (GWP) Cradle-to-Gate | 11,4404 kg CO2e / 1 Piece |


# Technical data sheet

## Cover, cross-over FS

Item number: 7027810



### Dimensions

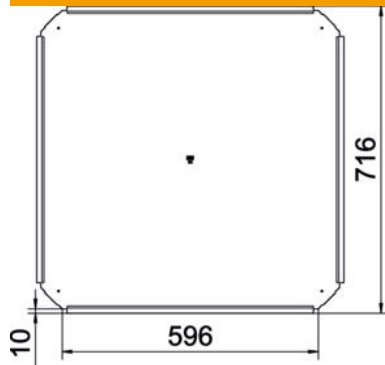

|                 |        |
|-----------------|--------|
| Width           | 600 mm |
| Plate thickness | 1 mm   |
| Dimension B     | 600 mm |

### Technical data

|                                   |        |
|-----------------------------------|--------|
| Number of turn buckles            | 0 St.  |
| Fastening type                    | On top |
| Suitable for cable ladder         | no     |
| Suitable for cable tray           | yes    |
| Rustproof steel, pickled          | no     |
| Permitted temperature range, max. | 120 °C |
| Permitted temperature range, min. | -20 °C |