

# Technical data sheet

## Screw plug, metric thread

Item number: 2090662



Metal screw plug with integrated sealing ring To close unused threaded openings, e.g. in housings or junction and branch boxes. With metric thread to DIN EN 60423 or ISO 68. Protection class IP 68 (5 bar/1 h).



Brass



Nickel-plated

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 2090662                  |
| Type                               | 168 MS M40 + O           |
| Description 1                      | Screw plug               |
| Description 2                      | with O ring              |
| Manufacturer                       | OBO                      |
| Dimension                          | Ø45x12                   |
| Material                           | Brass                    |
| Surface                            | Nickel-plated            |
| Surface standard                   |                          |
| Smallest sales unit                | 50                       |
| Unit of quantity                   | Piece                    |
| Weight                             | 0.058 kg                 |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0044 kg CO2e / 1 Piece |


# Technical data sheet

## Screw plug, metric thread

Item number: 2090662



### Dimensions

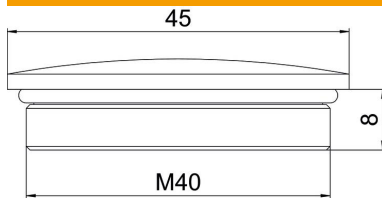

|             |       |
|-------------|-------|
| Length      | 45 mm |
| Width       | 45 mm |
| Height      | 12 mm |
| Dimension D | 45 mm |
| Dimension L | 8 mm  |

### Technical data

|                               |           |
|-------------------------------|-----------|
| explosion-proof               | no        |
| For Ex zone gas               | Without   |
| For Ex zone dust              | Without   |
| Thread                        | M40 x 1,5 |
| Thread type                   | Metric    |
| Nominal thread size metric/PG | 40        |
| Thread increase               | 1.5 mm    |
| Fibre-glass reinforced        | no        |
| Halogen-free                  | yes       |
| Impact-resistant              | no        |
| Protection rating             | IP68      |