


# Technical data sheet

## Mounting lid for UZD250-3/4

Item number: 7400613

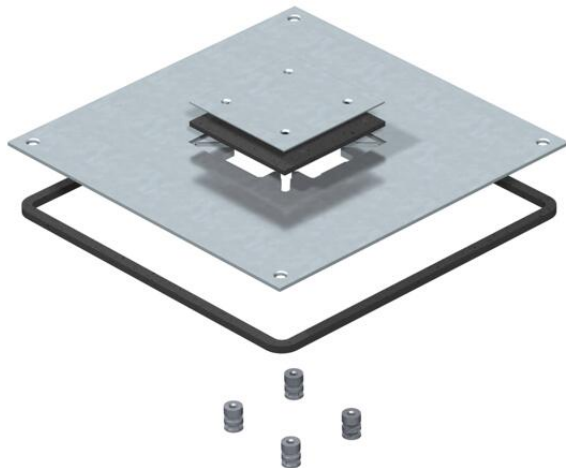

Mounting lid for underfloor junction and branch box of type UZD250-3/4.  
Installation opening 3 mm recessed as a later blanking lock with lid blind plate.



St

Steel

FS

Strip galvanised

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 7400613                  |
| Type                               | DUF 250-3DAT             |
| Description 1                      | Mounting lid             |
| Description 2                      | for UZD250-3/4           |
| Manufacturer                       | OBO                      |
| Dimension                          | 282x282x4                |
| Material                           | Steel                    |
| Surface                            | Strip galvanised         |
| Surface standard                   | DIN EN 10346             |
| Smallest sales unit                | 1                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 240 kg                   |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 6,8962 kg CO2e / 1 Piece |


# Technical data sheet

## Mounting lid for UZD250-3/4

Item number: 7400613



### Dimensions

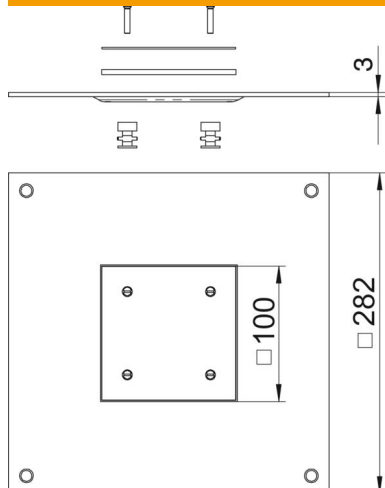

|             |        |
|-------------|--------|
| Length      | 282 mm |
| Width       | 282 mm |
| Height      | 4 mm   |
| Dimension a | 100 mm |
| Dimension A | 282 mm |

### Technical data

|                                                   |        |
|---------------------------------------------------|--------|
| Mounting opening cover                            | yes    |
| Floor care                                        | Wet    |
| Seal installation option                          | yes    |
| Installation opening for on-floor tank            | yes    |
| Suitable for screed-flush closed underfloor ducts | no     |
| Suitable for screed-covered underfloor ducts      | yes    |
| Trunking width, max.                              | 250 mm |
| Trunking width, min.                              | 190 mm |
| Material thickness                                | 4 mm   |
| Mounting opening                                  | Square |
| Nominal size                                      | 250 mm |
| Heavy-duty version                                | no     |