

Technical data sheet

PV surge arrester 1,500 V with remote signalling

Item number: 5094296



Surge arrester, type 2 for PV systems

- Complete unit of pluggable varistor arrester with cut-off unit
- Surge protection equipotential bonding to IEC 60364-7-712
- Tested to EN 61643-31
- Discharge capacity up to 30 kA (8/20) per pole
- Low DC protection level: < 5.0 kV and Uoc max = 1,500 V DC
- With visual function display for the use in distributor housings
- With RS contact as potential-free changeover



Master data

Item number	5094296
Type	PV-T2+FS-1500
Description 1	PV CombiController
Description 2	three-pole for PV systems + RS
Manufacturer	OBO
Dimension	1500V DC
Smallest sales unit	1
Unit of quantity	Piece
Weight	43.4 kg
Weight unit	kg/100 pc.


Technical data sheet

PV surge arrester 1,500 V with remote signalling

Item number: 5094296



Dimensions

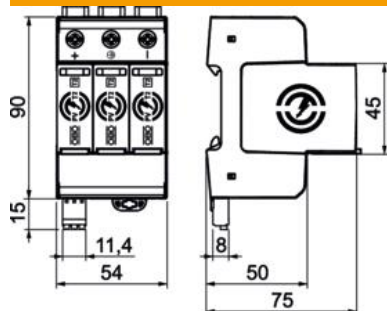

Length	75 mm
Width	54 mm
Height	110 mm

Technical data

Connection cross-section (min.)	1.5 mm ²
Connection cross-section, FM terminals, max.	16 AWG
Connection cross-section, FM terminals, max.	1.5 mm ²
Connection cross-section, FM terminals, min.	23 AWG
Connection cross-section, FM terminals, min.	0.25 mm ²
Response time	<25 ns
Version for	3-pole for PV systems
Pole version	3
Structural width in division units (division unit, 17.5 mm)	3
Lightning surge current (10/350 µs)	7 kA
Torque	39.9 Lbs
Torque	4.5 Nm
FM contacts	Changeover
Function/defect display	Visual
Suitable for outdoor use	no
Maximum continuous voltage DC	1500 V
Integrated back-up fuse	no
Conductor cross-section, flexible (fine-wire), max.	35 mm ²
Conductor cross-section, flexible (fine-wire), max.	4 AWG
Conductor cross-section, flexible (fine-wire), min.	16 AWG
Conductor cross-section, flexible (fine-wire), min.	2.5 mm ²
Conductor cross-section, rigid (single-wire/multiwire), max.	2 AWG
Conductor cross-section, rigid (single-wire/multiwire), max.	35 mm ²
Conductor cross-section, rigid (single-wire/multiwire), min.	16 AWG
Conductor cross-section, rigid (single-wire/multiwire), min.	2.5 mm ²
Lightning protection zone LPZ	0→2
Humidity, min.	5 %

Technical data sheet

PV surge arrester 1,500 V with remote signalling

Item number: 5094296



Technical data

Humidity, max.	95 %
Max. PV voltage	1500 V
Maximum discharge current (8/20 µs)	30 kA
Installation type	DIN rail 35 mm
Nominal discharge current (8/20 µs)	20 kA
Network form	DC
DC network form	yes
IT network form	no
Other network form	no
TN network form	no
TN-C network form	no
TN-C-S network form	no
TN-S network form	no
TT network form	no
Pole number	3
Ports	One-Port SPD
Test class, type 2	yes
ROHS-conformant	yes
Switching power AC	250 V; 1,0 A / 125 V; 1,0 A
Switching power DC	48 V; 0,5 A / 24 V; 0,5 A / 12 V; 0,5 A
Protection rating	IP20
Protection level	≤5 kV
Signalling on device	Visual
SPD to EN 61643-11	Type 2
SPD to IEC 61643-11	Class II
Permitted temperature range, max.	85 °C
Permitted temperature range, min.	-40 °C
Number of conductors (without earth)	2