


Technical data sheet

Cover, angle-adjustable bend A2

Item number: 6037562



Cover for angle-adjustable bend fitting for lockable and screw-on cable trays in indoor and outdoor areas, to protect cables against damage and soiling. Fastening with pre-mounted sash locks and through attachment of the section cover. Suitable for all side heights.

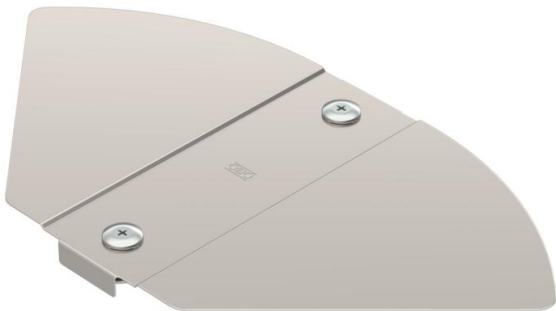

- A2Stainless steel
- 2BBright, treated

Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 6037562                  |
| Type                               | RBD W 200 A2             |
| Description 1                      | Cover                    |
| Description 2                      | for bend, adjustable     |
| Manufacturer                       | OBO                      |
| Dimension                          | B200mm                   |
| Colour                             | stainless steel          |
| Material                           | Stainless steel 1.4301   |
| Surface                            | Bright, treated          |
| Surface standard                   |                          |
| Smallest sales unit                | 1                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 35 kg                    |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 3,3492 kg CO2e / 1 Piece |


# Technical data sheet

## Cover, angle-adjustable bend A2

Item number: 6037562



### Dimensions



|                 |         |
|-----------------|---------|
| Width           | 200 mm  |
| Plate thickness | 0.75 mm |
| Dimension B     | 200 mm  |

### Technical data

|                                   |            |
|-----------------------------------|------------|
| Bend (angle)                      | Adjustable |
| Number of turn buckles            | 2 St.      |
| Fastening type                    | Sash lock  |
| Maintain electrical functions     | no         |
| Suitable for mesh cable tray      | no         |
| Suitable for cable ladder         | no         |
| Suitable for cable tray           | yes        |
| Change of direction               | Horizontal |
| ROHS-conformant                   | yes        |
| Rustproof steel, pickled          | no         |
| Hinged                            | no         |
| Permitted temperature range, max. | 120 °C     |
| Permitted temperature range, min. | -20 °C     |