

Technical data sheet

Spreading anchor, plastic

Item number: 2347729



Nylon spreading anchor for mounting components on walls and ceilings. Suitable for solid building materials such as concrete, sand-lime brick and masonry. With pre-fixing of the screw for easy overhead mounting. The given load values are valid for wood screws with the specified diameter.



PA Polyamide

Master data

Item number	2347729
Type	SX Plus 10x50
Description 1	Spreading anchor
Manufacturer	OBO
Dimension	10x50
Colour	Light grey
Material	Polyamide
Smallest sales unit	50
Unit of quantity	Piece
Weight	0.276 kg
Weight unit	kg/100 pc.


Technical data sheet

Spreading anchor, plastic

Item number: 2347729



Dimensions

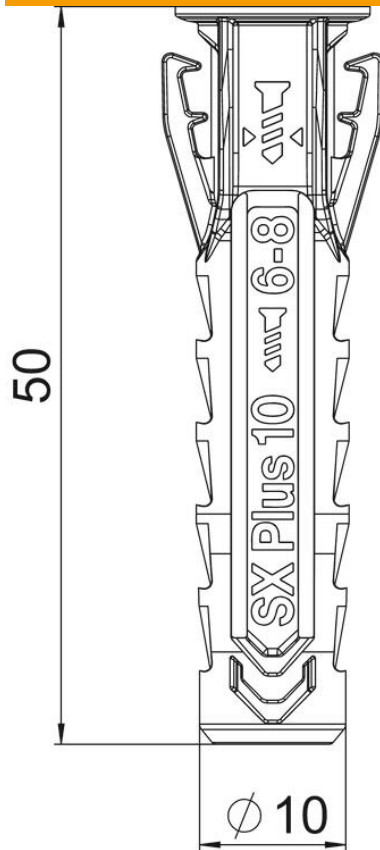

Length	50 mm
Dimension D	10 mm
Dimension L	50 mm

Technical data sheet

Spreading anchor, plastic

Item number: 2347729



Technical data

Version for	Spreading anchor
Concrete Frat	1400
Drill hole depth	70 mm
Drill hole diameter, max.	10 mm
Drill hole diameter, min.	10 mm
Suitable for fastening with cable ties	no
Suitable for gas concrete	yes
Suitable for screw diameter, max.	8 mm
Suitable for screw diameter, min.	6 mm
Suitable for hexagonal wood screw	yes
Hollow brick Hlz12 Frat	250
Porous calcareous sandstone KSL12 Fempf.	450
Solid calcareous sandstone KSL12 Frat	1400
With edge	yes
With bolts	no
Porous concrete P2 Fempf.	180
Porous concrete P4 Fempf.	500
Full brick Mz12 Frat	1000
Suitable for material	Calcareous sandstone Porous concrete Concrete Gas concrete Plasterboard Full brick Hollow brick
Mounting type, anchor, tie	Push-through mounting Pre-mounting