

Technical data sheet

Spreading anchor, plastic

Item number: 2347723



Nylon spreading anchor for mounting components on walls and ceilings. Suitable for solid building materials such as concrete, sand-lime brick and masonry. With pre-fixing of the screw for easy overhead mounting. The given load values are valid for wood screws with the specified diameter.



PA Polyamide

Master data

Item number	2347723
Type	SX Plus 6x30
Description 1	Spreading anchor
Manufacturer	OBO
Dimension	6x30
Colour	Light grey
Material	Polyamide
Smallest sales unit	100
Unit of quantity	Piece
Weight	0.061 kg
Weight unit	kg/100 pc.


Technical data sheet

Spreading anchor, plastic

Item number: 2347723



Dimensions

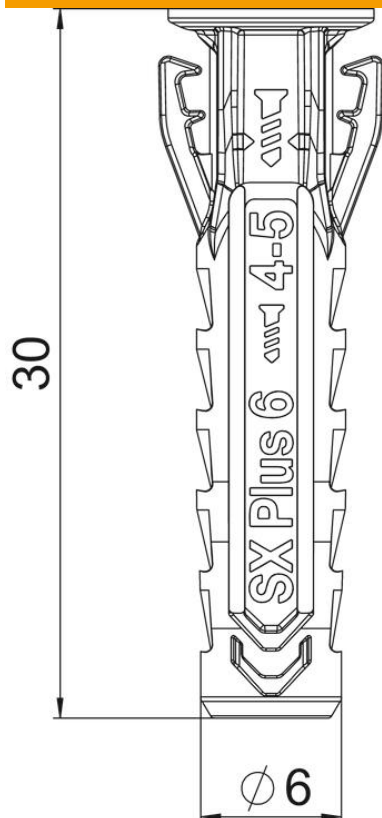

Length	30 mm
Dimension D	6 mm
Dimension L	30 mm

Technical data sheet

Spreading anchor, plastic

Item number: 2347723



Technical data

Version for	Spreading anchor
Concrete Frat	650
Drill hole depth	40 mm
Drill hole diameter, max.	6 mm
Drill hole diameter, min.	6 mm
Suitable for fastening with cable ties	no
Suitable for gas concrete	yes
Suitable for screw diameter, max.	5 mm
Suitable for screw diameter, min.	4 mm
Suitable for hexagonal wood screw	yes
Hollow brick Hlz12 Frat	150
Porous calcareous sandstone KSL12 Fempf.	300
Solid calcareous sandstone KSL12 Frat	650
With edge	yes
With bolts	no
Porous concrete P2 Fempf.	70
Porous concrete P4 Fempf.	200
Full brick Mz12 Frat	350
Suitable for material	Calcareous sandstone Porous concrete Concrete Gas concrete Plasterboard Full brick Hollow brick
Mounting type, anchor, tie	Push-through mounting Pre-mounting