


# Technical data sheet

## Insulated air-termination rod for inner-routed isCon® conductor with side exit

Item number: 5408874

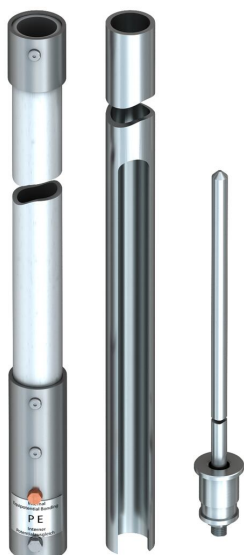

- For routing the OBO isCon® conductors in pipes
- With cable outlet to the side, matching the isFang air-termination stand with outlet to the side, type isFang 3B-A
- Suitable for wind loads according to Eurocode 1: DIN EN 1991-1-4
- Tested according to VDE V 0185-561-8 (IEC TS 62561-8)
- Stand pipe and interception tip made from aluminium
- Middle piece made from glass-fibre reinforced plastic (GFK)



**GFK** Fibre-glass-reinforced plastic

### Master data

|                                    |                                |
|------------------------------------|--------------------------------|
| Item number                        | 5408874                        |
| Type                               | isFang IN-A L4                 |
| Description 1                      | Insul. interception rod+outlet |
| Description 2                      | for isCon conductor, internal  |
| Manufacturer                       | OBO                            |
| Dimension                          | 4000mm                         |
| Material                           | Fibre-glass-reinforced plastic |
| Smallest sales unit                | 1                              |
| Unit of quantity                   | Piece                          |
| Weight                             | 535 kg                         |
| Weight unit                        | kg/100 pc.                     |
| CO2 Footprint (GWP) Cradle-to-Gate | 49,6043 kg CO2e / 1 Piece      |


# Technical data sheet

Insulated air-termination rod for inner-routed isCon® conductor with side exit

Item number: 5408874



## Dimensions

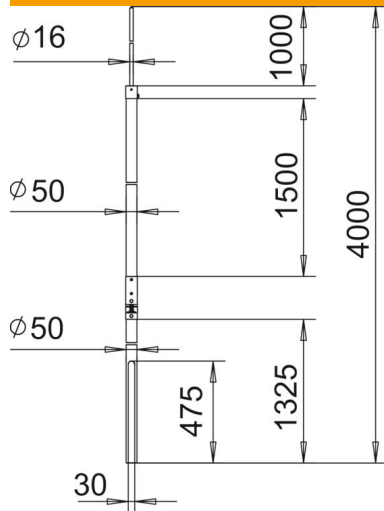

|                  |          |
|------------------|----------|
| Length           | 4,000 mm |
| Dimension A      | 1,325 mm |
| Dimension B      | 1,000 mm |
| Dimension d min. | 50 mm    |
| Dimension H      | 1,500 mm |
| Dimension L      | 4,000 mm |

## Technical data

|                                           |                     |
|-------------------------------------------|---------------------|
| Connection                                | Round conductor     |
| Version for                               | Air-termination rod |
| High voltage-resistant, insulated version | yes                 |